


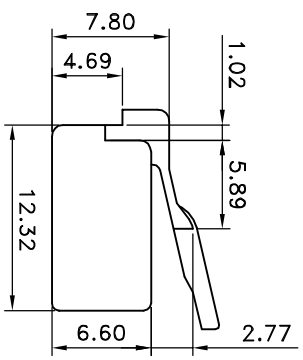
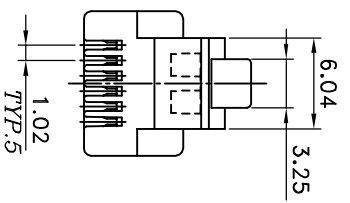


REV	更改日期	变更内容	修改
11/05/05	11/05/05	MODIFICATION	DRAWN



Round

Flat

SPECIFICATIONS
1. ELECTRICAL:
 UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
 INSULATION RESISTANCE: 100 MΩ.
 TERMINATION: RESISTANCE 20mΩ MAX AFTER ENVIRONMENTAL TESTING.

2. MECHANICAL:
 CABLE-TO-PLUG TENSILE STRENGTH: 19.6N/PCS MIN.
 DURABILITY: 200 MATING CYCLES.
3. MATERIAL & FINISH:
 HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
 COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE.
 CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
 GOLD PLATING: 3u"~50u" ARE AVAILABLE.

规范
 1. 电器:

UL应用最大250V VOLTS AC.

介质耐电压伏特数:500V VOLTS AC.

绝缘阻抗:100百万欧姆.

终端阻抗:在环境测试后最大可承受20微欧姆终端阻抗.

2. 机构

拉力测试:至少19.6N/PCS.

耐力测试:至少200次之插拔测试.

3. 材质表面处理

塑胶壳:聚碳酸酯, UL-94V-0 or UL94V-2.

颜色:透明,或者其他颜色亦可.

金片:磷铜片.

导体:多股线&单股线, 24AWG, 26AWG.

镀金厚度:3u"~50u", 皆可提供.

客户用产品图

BLADE:

Type	E-03	B-03	Y-03	Z-03
Drawing				
Mark				



卓新工业股份有限公司
 EXCELLENCE WIRE IND.CO.,LTD

DIMENSION IN mm (inch)	材 质	图 号
TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL	DWG NO.
.X±0.20	PC	PLUG-006-EXW
.XX±0.10	名称	PLUG-6P6C
.X°±5°	Description	
.XX°±2°	制 图	
审核	核准	
APPROVAL	CHECKED	

比例	张数
SCALE	SHEET
2/1	1/1
角法	更改
PROJ.	REV
	A

ST-DR-009A